

N20/30

FF030

RF130

BLDC  
1632

FF130

FF180

RF500

RF300

RF310

094

BLDC  
2035

370

2418

2430

385

2838

395

30-C

32-C

40-C

32ZY13

32ZY25

520

BLDC  
520

380

555

BLDC  
3640

775

38S

BLDC  
38S

45S

BLDC  
45S

50S

BLDC  
50S

60S

BLDC  
60S

80S


稳压器

同步  
电机永磁  
直流电机交流  
可逆电机

# ZGA17RU(A3001)



## Dimension(mm)

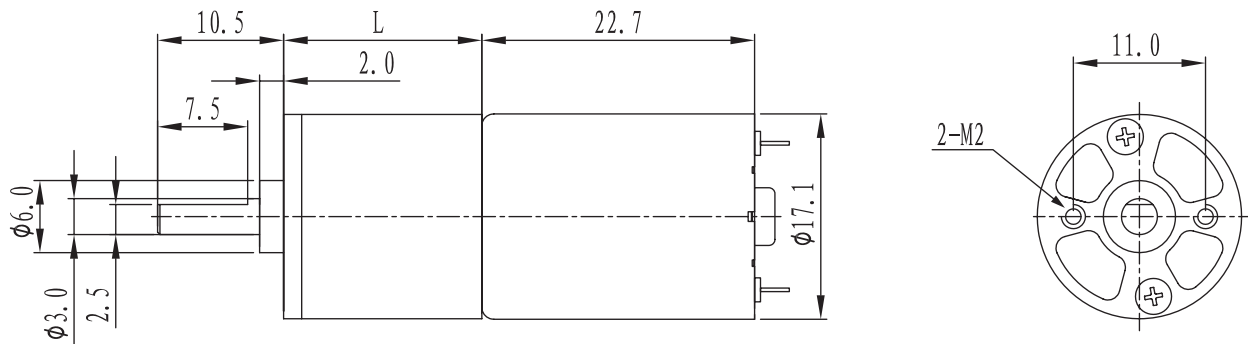

## Specification

DC Motor	Ratio	1/9	1/19	1/40	1/83.6	1/175	1/365	1/764
ZYTD-RF130 (12V-5600R)	No load (r/min)	595	285	135	65	31	15	7
	On load (r/min)	430	205	100	45	22	11	5
	Rated Torque (gf.cm)	30	60	110	220	410	780	1400
回转方向	电源正极接 + 端子	CCW	CW	CCW	CW	CCW	CW	CCW

## Gearbox

Reduction Ratio	L	Stages	Allowable Torque	
	mm		mN.m	gf.cm
1/9	16.5	3	29	300
1/19	16.5	4	49	500
1/40	16.5	5	49	500
1/83.6	18.1	6	78	800
1/175	20	7	98	1000
1/365	22	8	147	1500
1/764	24	9	147	1500

★ 本公司可定做各种非标产品，如有需要请来电话咨询。

007

浙江正科电机有限公司 Tel:0577-6289 0088 Fax:0577-6287 1122 Http:www.zhengkemotor.com