


ZGA20RU(A3001)



Dimension(mm)

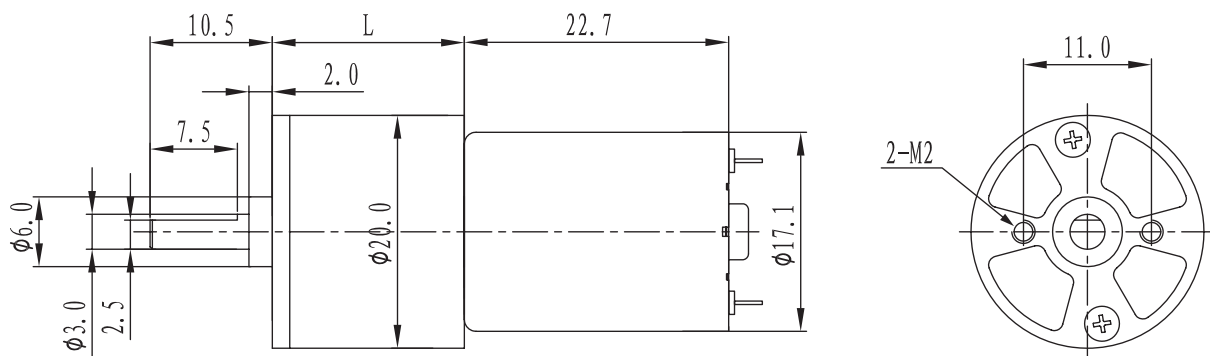

Specifications:

DC Motor	Ratio	1/5.8	1/13.8	1/19.1	1/33	1/40	1/79.6	1/84	1/175	1/191	1/365	1/458.6	1/764	1/1100	1/2641
ZYTD-RF130 (12V-5600R)	No load (r/min)	925	390	280	165	135	67	64	31	28	15	12	7	5	2
	On load(r/min)	670	280	200	120	95	49	46	22	20	10.5	8.5	5	4	2
	Rated Torque (gf.cm)	20	50	60	105	120	235	220	420	500	780	1050	1400	2000	2000
Direction	电源正极接 + 端子	CW	CCW	CW		CCW		CW	CCW	CW	CW	CCW	CCW	CW	CCW

Gearbox

Reduction Ratio	L mm	Stages	Allowable Torque	
			mN.m	gf.cm
1/5.8	16.5	2	39	400
1/13.8	16.5	3	58	600
1/19.1~1/33	16.5	4	78	800
1/40 1/79.6	16.5	5	98	1000
1/84 1/191	18.1	6	147	1500
1/175 1/458.6	20	7	147	1500
1/365 1/1100	22	8	196	2000
1/764 1/2641	24	9	196	2000

★ Other specification can be customized