


ZGA25RP(A4049)



Dimension(mm)

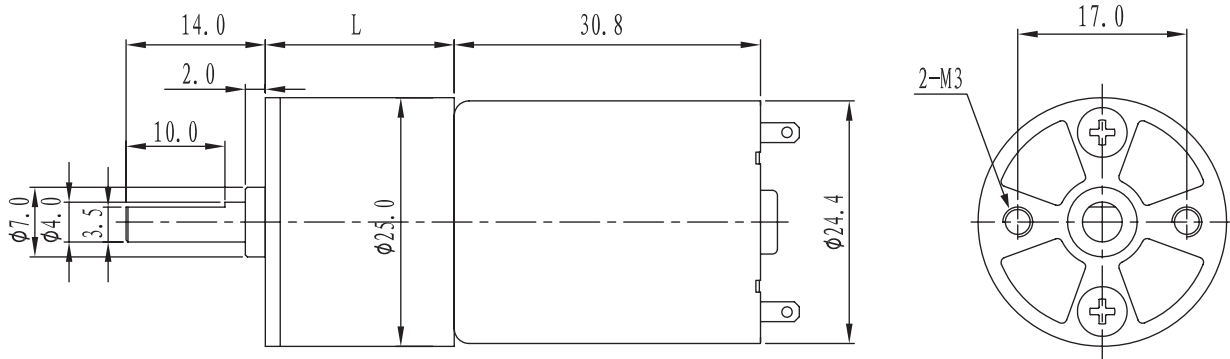

Specifications

| DC Motor | Ratio | 1/4.8 | 1/10.6 | 1/14.7 | 1/27.5 | 1/32 | 1/51.5 | 1/71 | 1/98 | 1/113 | 1/156 | 1/216 | 1/293 | 1/404 | 1/474 | 1/654 |
|-------------------------|----------------------|-------|--------|--------|--------|------|--------|------|------|-------|-------|-------|-------|-------|-------|-------|
| ZYTD-370 (12V-5600R) | No load (r/min) | 1150 | 520 | 380 | 200 | 175 | 110 | 80 | 57 | 49 | 36 | 26 | 19 | 14 | 12 | 8.5 |
| | On load (r/min) | 1000 | 450 | 320 | 170 | 150 | 90 | 65 | 48 | 42 | 30 | 22 | 16 | 12 | 10.5 | 8 |
| | Rated torque(gf.cm) | 70 | 150 | 210 | 360 | 410 | 600 | 800 | 1100 | 1200 | 1600 | 2200 | 2500 | 2500 | 2500 | 2500 |
| ZYTD-370 (24V-4600R) | N load(r/min) | 980 | 445 | 320 | 170 | 145 | 90 | 65 | 48 | 42 | 30 | 22 | 16 | 12 | 10 | 7 |
| | On load (r/min) | 830 | 375 | 270 | 145 | 125 | 75 | 55 | 40 | 35 | 25 | 18 | 13 | 10 | 9 | 6.5 |
| | Rated torque (gf.cm) | 70 | 150 | 210 | 360 | 410 | 600 | 800 | 1100 | 1200 | 1600 | 2200 | 2500 | 2500 | 2500 | 2500 |
| Direction | 电源正极接 + 端子 | CCW | CW | CCW | CW | CCW | CW | CCW | CW | CCW | CW | CCW | CW | CCW | CW | CCW |

Gearbox

| Reduction Ratio | L | Stages | Allowable torque | |
|-----------------|----|--------|------------------|-------|
| | mm | | mN.m | gf.cm |
| 1/4.8 | 19 | 2 | 59 | 600 |
| 1/10.6~1/14.7 | 19 | 3 | 78 | 800 |
| 1/27.5~1/32 | 19 | 4 | 98 | 1000 |
| 1/51.5~1/98 | 22 | 5 | 147 | 1500 |
| 1/113~1/216 | 24 | 6 | 245 | 2500 |
| 1/293~1/654 | 27 | 7 | 245 | 2500 |

★ 本公司可定做各种非标产品，如有需要请来电话咨询。

N20/30
FF030
RF130
BLDC 1632
FF130
FF180
RF500
RF300
RF310
094
BLDC 2035
370
2418
2430
385
2838
395
30-C
32-C
40-C
32ZY13
32ZY25
520
BLDC 520
380
555
BLDC 3640
775
38S
BLDC 38S
45S
BLDC 45S
50S
BLDC 50S
60S
BLDC 60S
80S
稳压器
同步电机
永磁直流电机
交流可逆电机