


ZGA28RP(A4049)



Dimension(mm)

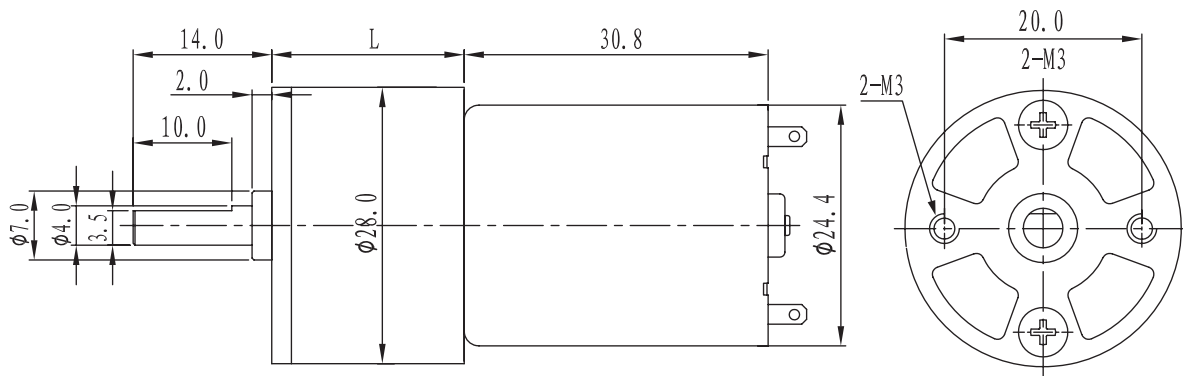

Specifications:

DC Motor	Ratio	1/5.6	1/13	1/26	1/31	1/37.8	1/62	1/73.8	1/147	1/174	1/249	1/295	1/348	1/412	1/824	1/974
ZYTD-370 (12V-5600R)	No load(r/min)	990	425	210	180	145	90	75	38	32	22	19	16	13.5	6.5	5.7
	On load (r/min)	860	370	180	150	120	75	60	32	27	19	16	14	12	6.2	5.5
	Rated Torque(kgf.cm)	0.09	0.19	0.34	0.4	0.44	0.73	0.87	1.5	1.8	2.3	2.8	3	3	3.5	3.5
ZYTD-370 (24V-4600R)	No load (r/min)	840	360	180	150	125	75	64	32	27	19	16	13	11	5.7	4.8
	On load (r/min)	710	300	150	130	105	64	54	27	23	16	13	11	9	5.4	4.5
	Rated Torque (kgf.cm)	0.09	0.19	0.34	0.4	0.44	0.73	0.87	1.5	1.8	2.3	2.8	3	3	3.5	3.5
Direction	电源正极接 + 端子	CCW	CW	CCW	CW				CCW	CW				CCW		

Gearbox

Reduction Ratio	L	Stages	Allowable torque	
	mm		mN.m	kgf.cm
1/5.6	19.5	2	59	0.6
1/13	19.5	3	98	1
1/26~1/31	19.5	4	147	1.5
1/37.8~1/73.8	22.5	5	198	2
1/147~1/174	24.5	6	245	2.5
1/249~1/412	26.5	7	298	3
1/824~1/974	29.5	8	345	3.5

★ Other specification can be customized.

N20/30
FF030
RF130
BLDC 1632
FF130
FF180
RF500
RF300
RF310
094
BLDC 2035
370
2418
2430
385
2838
395
30-C
32-C
40-C
32ZY13
32ZY25
520
BLDC 520
380
555
BLDC 3640
775
38S
BLDC 38S
45S
BLDC 45S
50S
BLDC 50S
60S
BLDC 60S
80S
稳压器
同步电机
永磁直流电机
交流可逆电机