

N20/30

FF030

RF130

BLDC
1632

FF130

FF180

RF500

RF300

RF310

094

BLDC
2035

370

2418

2430

385

2838

395

30-C

32-C

40-C

32ZY13

32ZY25

520

BLDC
520

380

555

BLDC
3640

775

38S

BLDC
38S

45S

BLDC
45S

50S

BLDC
50S

60S

BLDC
60S

80S


稳压器

同步
电机永磁
直流电机交流
可逆电机

ZGB37RDI(A6587)



Dimension(mm)

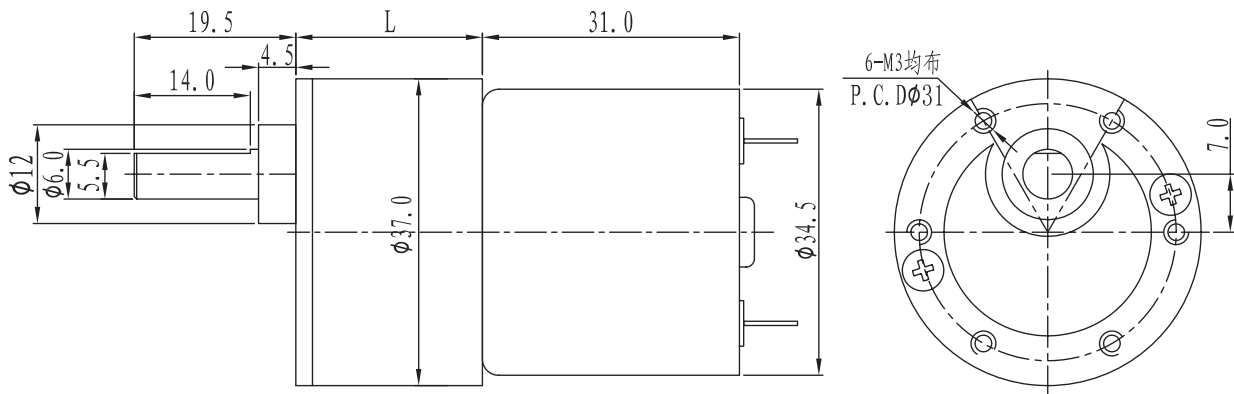

Specifications

DC Motor	Ratio	1/7.5	1/13.5	1/20	1/31	1/47.5	1/57.7	1/64	1/73	1/83	1/94.9	1/111	1/148	1/171	1/194	1/221	1/258	1/314	1/382	1/516	1/604	1/981
ZYTD-30-C (12V-5000R)	No load(r/min)	685	380	255	165	108	89	80	70	62	54	56	35	30	26	23	20	16	13	10	8	5
	On load (r/min)	580	320	215	140	91	75	68	59	52	56	39	29	25	22	20	17	14	12	9	8	5
	Rated Torque (kgf.cm)	0.25	0.4	0.6	0.9	1.4	1.7	1.7	1.9	2.2	2.5	2.9	3.9	4	4.5	5	6	7.5	8	10	10	10
ZYTD-30-C (24V-8000R)	No load (r/min)	1080	600	400	260	170	140	125	110	97	85	73	55	47	42	37	31	26	21	16	13	8
	On load (r/min)	900	500	340	220	140	120	105	92	81	71	61	45	40	35	31	26	22	19	14	12	8
	Rated torque (kgf.cm)	0.35	0.55	0.8	1.1	1.8	2.2	2.2	2.5	2.8	3.2	3.8	5	5.2	6	6.8	8	8	8	10	10	10
Direction	电源正极接 + 端子	CW	CCW	CW	CCW			CW			CCW			CW			CCW					

Gearbox

Reduction Ratio	L	Stages	Allowable torque	
	mm		mN.m	kgf.cm
1/7.5	23	3	147	1.5
1/13.5~1/20	23	4	245	2.5
1/31~1/57.7	25	5	392	4
1/64~1/148	27	6	588	6
1/171~1/382	30	7	784	8
1/516~1/981	31	8	980	10

★ Other specification can be customized.

059

浙江正科电机有限公司 Tel:0577-6289 0088

Fax:0577-6287 1122

Http:www.zhengkemotor.com