


# ZGX28RO(A6X60)



## Dimension(mm)

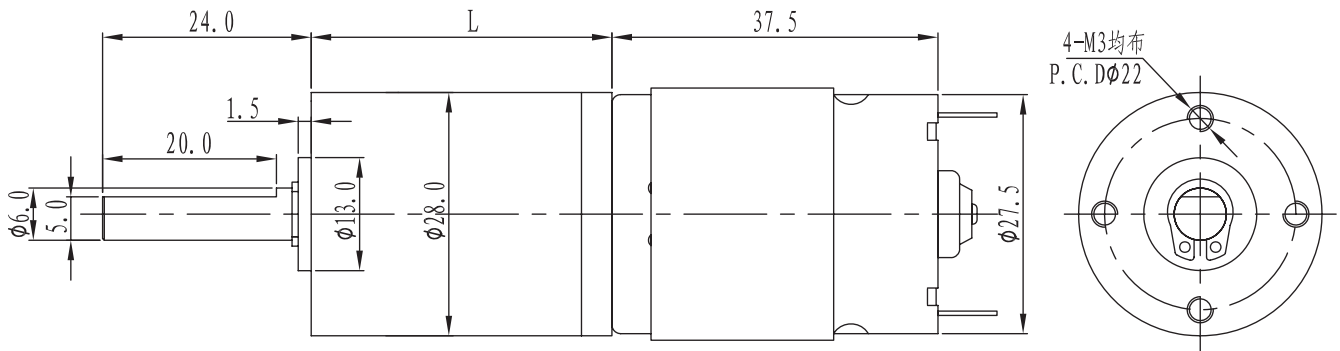

## Specifications

DC Motor	Ratio	1/16	1/22.6	1/64	1/90	1/107.2	1/256	1/361	1/428	1/509
ZYTD-385 (12V-5000R)	No load (r/min)	300	210	75	55	45	19	13	11	9.5
	On load (r/min)	240	163	61	45	37	16	11	10	9
	Rated torque (kgf.cm)	0.6	1	2.5	3	4	6	6	6	6
ZYTD-385 (24V-5000R)	No load (r/min)	300	210	75	55	45	19	13	11	9.5
	On load (r/min)	240	163	61	45	37	16	11	10	9
	Rated torque (kgf.cm)	0.6	1	2.5	3	4	6	6	6	6
Direction	电源正极接 + 端子	CCW								

## Gearbox

Reduction Ratio	L	Stages	Allowable torque	
	mm		mN.m	kgf.cm
1/16~1/22.6	34.6	2	196	2
1/64~1/107.2	41.6	3	392	4
1/256~1/509	48.6	4	588	6

★ Other specification can be customized.