


ZGX50RHH(A12X17)



Dimension(mm)

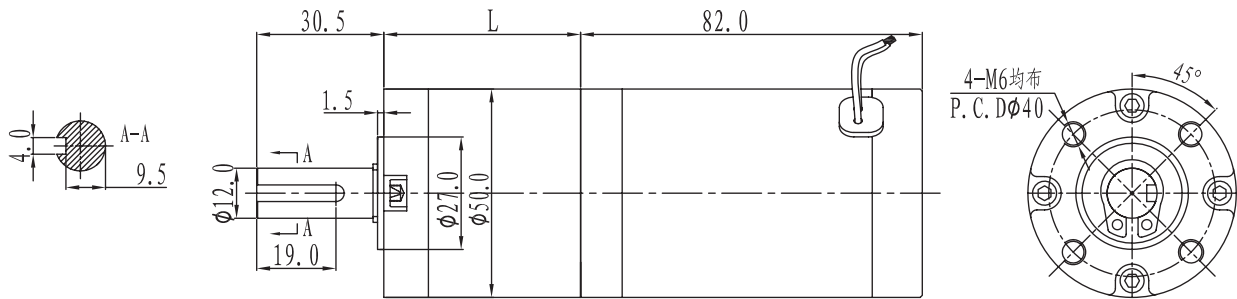

Specifications

DC Motor	Ratio	1/4.8	1/21.6	1/33	1/103.6	1/124	1/148.7	1/190	1/497	1/596	1/714	1/855	1/2388	1/2861	1/3428	1/4106
ZYTD-50S-R (12V-2000R)	No load (r/min)	420	93	61	19	16	14	10.5	4.02	3.35	2.8	2.34	0.83	0.7	0.58	0.49
	On load (r/min)	350	78	51	16	14	12	9.1	3.8	3.2	2.69	2.26	0.83	0.69	0.58	0.49
	Rated torque (kgf.cm)	1.7	7.4	11	32	37	45	50	50	50	50	50	50	50	50	50
ZYTD-50S-R (24V-3000R)	No load (r/min)	630	140	91	29	24	20	15.8	6.06	5.05	4.22	3.52	1.26	1.05	0.88	0.73
	On load (r/min)	530	117	77	25	21	17	13.7	5.71	4.81	4.05	3.4	1.24	1.04	0.87	0.73
	Rated torque (kgf.cm)	1.7	7.4	11	32	37	45	50	50	50	50	50	50	50	50	50
Direction	电源正极接 + 端子	CCW														

Gearbox

Reduction Ratio	L	Stages	Allowable torque	
	mm		mN.m	kgf.cm
1/4.8	33.2	1	490	5
1/21.6~1/33	47.2	2	1960	20
1/103.6~1/190	61.2	3	4900	50
1/497~1/855	75.2	4	4900	50
1/2388~1/4106	89.2	5	4900	50

★ Other specification can be customized.